

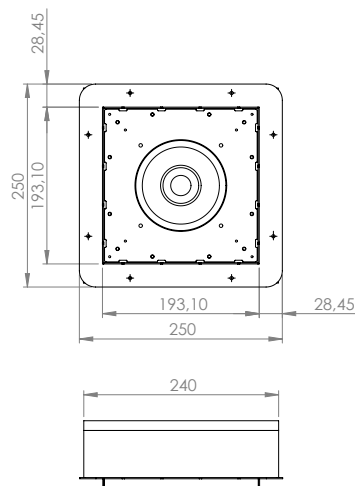
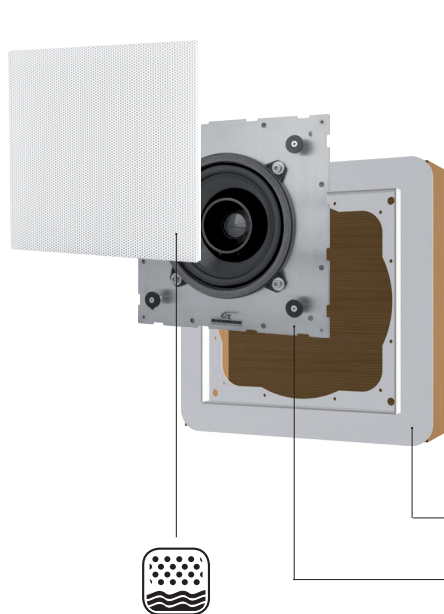


SIR14M**SIR14V****FLUSH-MOUNT IN-WALL FOR PLASTERBOARD****White front cover**Code: **11BXM**

Dimensions HxWxD (cm) 19,0 x 19,0 x 0,8

Weight (Kg) 0,18

Finishes White microperforated metal grille

Loudspeaker

Code (8 Ω): **SIR14M**
Code (70V / 100V): **SIR14V**

Type Double-cone

Components Glass fiber double-cone

Power RMS / Max (8 Ω) 50 / 100

Power RMS W (70V / 100V) 50,0 - 37,5 - 25,0

Freq. resp. (Hz) 85 - 20k

Sensitivity dB (2,83V/1m) 88

Nom. impedance (Ω) 8

Protection Temperature range ($^{\circ}$ C) IP66 -20 / +100

Loudspeaker $\varnothing$ (cm) 13,0

Dimensions HxWxD (cm) 19,0 x 19,0 x 6,3

Weight (Kg) 0,78 / 1,18

BackboxCode: **CC1920**


Dimensions HxWxD (cm) 25,0 x 25,0 x 8,4

Installation hole plasterboard HxWxD (cm) 19,5 x 19,5 x 8,4 **D2**

Weight (Kg) 1,05

Materials Stainless Steel + Wood

Installation hole plasterboard

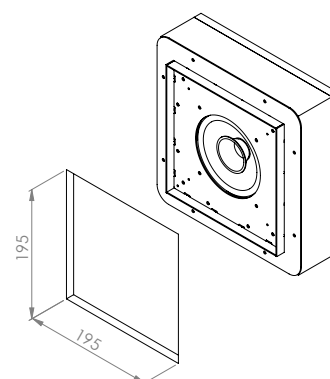

Marine Grille







Marine Speaker



Marine Steel Frame



Plasterboard

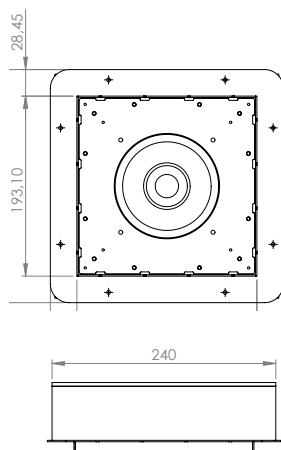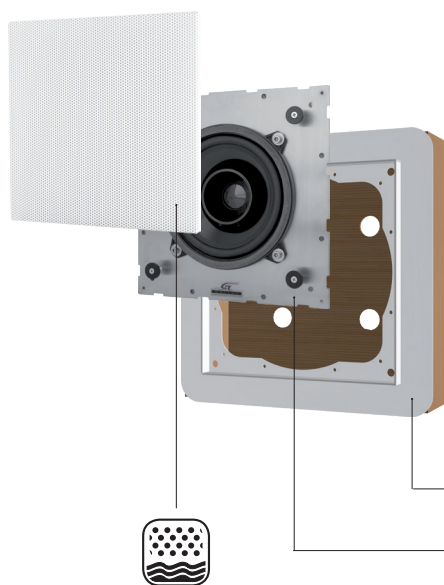SIR14M**SIR14V****FLUSH-MOUNT IN-WALL FOR CONCRETE**

Minimum depth recommended

**White front cover**Code: **11BXM****Loudspeaker**Code (8 Ω): **SIR14M**
Code (70V / 100V): **SIR14V****Backbox**Code: **CM1920****Dimensions HxWxD (cm)** 19,0 x 19,0 x 0,8**Weight (Kg)** 0,18**Finishes** White microperforated metal grille**Type** Double-cone**Components** Glass fiber double-cone**Power RMS / Max (8 Ω)** 50 / 100**Power RMS W (70V / 100V)** 50,0 - 37,5 - 25,0**Freq. resp. (Hz)** 85 - 20k**Sensitivity dB (2,83V/1m)** 88**Nom. impedance (Ω)** 8**Protection** IP66
Temperature range ($^{\circ}\text{C}$) -20 / +100**Woofer $\varnothing$ (cm)** 13,0
Tweeter voice coil $\varnothing$ (cm)**Dimensions HxWxD (cm)** 19,0 x 19,0 x 6,3**Weight (Kg)** 0,78 / 1,18**Dimensions HxWxD (cm)** 25,0 x 25,0 x 7,6**Installation hole wall HxWxD (cm)** 25,5 x 25,5 x 7,6 **D2****Weight (Kg)** 0,98**Materials** Stainless Steel + Wood**Marine Grille****Marine Speaker****Marine Steel Frame****Wall**



Wiring
Cablaggio
Câblage
Verdrahtung

Connect to speaker
Connessione al diffusore
Connexion à l'enceinte
Verbindung zum Lautsprecher

Connect to amplifier
Connessione all'amplificatore
Connexion à l'amplificateur
Verbindung zum Verstärker

0	Violet Viola Violet Violett	50 W	Brown Marrone Marron Braun
---	--------------------------------------	------	-------------------------------------

100 V	White Bianco Blanc Weiß	37,5 W	Red Rosso Rouge Rot
-------	----------------------------------	--------	------------------------------

70 V	Green Verde Vert Grün	25 W	Blue Blu Bleu Blau
------	--------------------------------	------	-----------------------------

Common Comune Câble commun Gemeinsames Kabel	Black Nero Noir Schwarz
---	----------------------------------

Specifications

Nominal power (W) <i>Potenza nominale (W)</i> Puissance nominale (W) Nennleistung (W)	50
--	----

Input voltage (V) <i>Tensione d'ingresso (V)</i> Tension d'entrée (V) Eingangsspannung (V)	70 / 100
---	----------

Frequency response (Hz) <i>Risp. in frequenza (Hz)</i> Rép. en fréquence (Hz) Frequenzgang (Hz)	40 - 21K
--	----------

Output power on 8 Ω (W) <i>Potenza di uscita su 8 Ω (W)</i> Puissance de sortie sur 8 Ω (W) Ausgangsleistung auf 8 Ω (W)	50,0 37,5 25,0
---	----------------------

Dimensions H x W x D (cm) <i>Dimensioni A x L x P (cm)</i> Dimensions H x L x P (cm) Abmessungen H x B x D (cm)	3,1 x 6,6 x 6,6
--	-----------------

IP Code Grado di protezione IP Indice de protection IP Schutzart	43
---	----

Weight (Kg) <i>Peso (Kg)</i> Poids (Kg) Gewicht (Kg)	0,39
---	------

